




# FLUORESCENT LUMINAIRES

## T8 Recess Louver (M Bar)

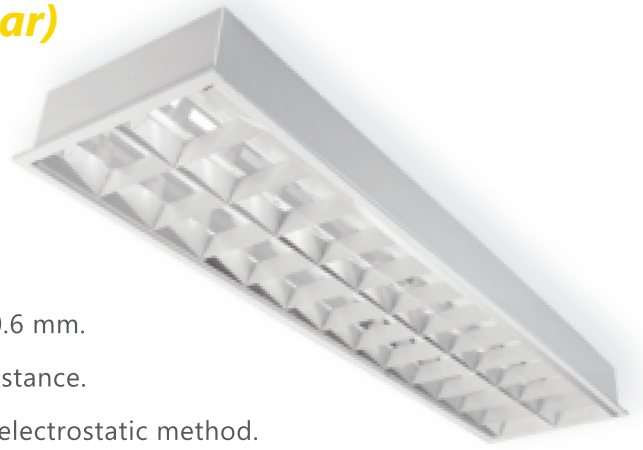




**CL-RL-02M-A**

- High quality cold-rolled steel housing of thickness 0.6 mm.
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Heavy duty spring -locked type lamp holder G13
- Cable THW 0.5 sq.mm. 105°C (TIS.11-1988 STANDARD)
- 99.85% high purity anodized aluminium reflector with Total Reflectance of 87% (87) mirror finished (DIN 5036-2) for normal usage.
- 99.85% high purity anodized louver with Total Reflectance of 87% (87) mirror finished for longitudinal with aluminium profile to anti-glare.
- Louver and profiles are applied to anti-glare.



### INSTALLATION & APPLICATION

- For recessed M-bar ceiling installation.
- Application : Office, Meeting Room, Hospitals, Commercial buildings.



MODEL	Type	Size	Dimension				
			W1	W2	L1(R/S)	L2(R/S)	H1(R/S)
CL-RL-02M-A-12-118-(R/S)	1 x FL T8 (S)	1' x 2'	270	296	610/635	636/661	85/105
CL-RL-02M-A-12-218-(R/S)	2 x FL T8 (S)	1' x 2'	270	296	610/635	636/661	85/105
CL-RL-02M-A-22-218-(R/S)	2 x FL T8 (S)	2' x 2'	570	596	610/635	636/661	85/105
CL-RL-02M-A-22-318-(R/S)	3 x FL T8 (S)	2' x 2'	570	596	610/635	636/661	85/105
CL-RL-02M-A-22-418-(R/S)	4 x FL T8 (S)	2' x 2'	570	596	610/635	636/661	85/105
CL-RL-02M-A-14-136-(R/S)	1 x FL T8 (L)	1' x 4'	270	296	1220/1245	1246/1271	85/105
CL-RL-02M-A-14-236-(R/S)	2 x FL T8 (L)	1' x 4'	270	296	1220/1245	1246/1271	85/105
CL-RL-02M-A-24-236-(R/S)	2 x FL T8 (L)	2' x 4'	570	296	1220/1245	1246/1271	85/105
<b>CL-RL-02M-A-24-336-(R/S)</b>	<b>3 x FL T8 (L)</b>	<b>2' x 4'</b>	<b>570</b>	<b>596</b>	1220/1245	1246/1271	85/105
CL-RL-02M-A-24-436-(R/S)	4 x FL T8 (L)	2' x 4'	570	596	1220/1245	1246/1271	85/105

\* (S) = Short Lamp (600 mm.) , (L) = Long Lamp (1200 mm.)