





# FLUORESCENT LUMINAIRES

## T8 V Shape V Type



**CL-BT-03**

- High quality cold-rolled steel housing of thickness 0.6 mm.
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Heavy duty spring -locked type lamp holder G13
- Cable THW 0.5 sq.mm. 105°C (TIS.11-1988 STANDARD)
- Suitable for general purpose with high efficiency requirement.
- Protection Class : IP20
- Application : Warehouse, Factory, Canteen
- Option : Emergency Light Single unit

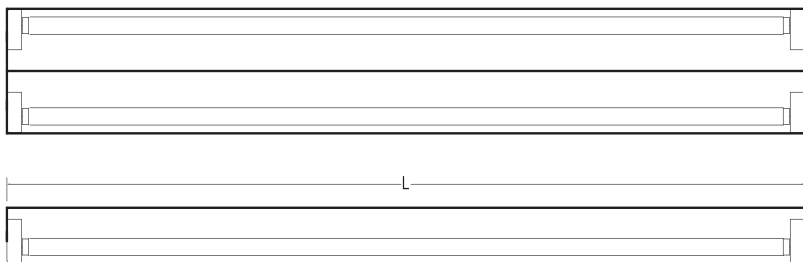

| MODEL              | Type          | Dimension |           |    |          | Remark |
|--------------------|---------------|-----------|-----------|----|----------|--------|
|                    |               | W         | L (R/S)   | H1 | H2 (R/S) |        |
| CL-BT-03-218-(R/S) | 2 x FL T8 (S) | 185       | 610/635   | 50 | 70/85    |        |
| CL-BT-03-236-(R/S) | 2 x FL T8 (L) | 185       | 1220/1245 | 50 | 70/85    |        |

\* (S) = Short Lamp (600 mm.) , (L) = Long Lamp (1200 mm.)