





FLUORESCENT LUMINAIRES

T8 V Shape U Type



CL-BT-02

- High quality cold-rolled steel housing of thickness 0.6 mm.
- Five-stage zinc phosphate pretreatment for rust resistance.
- Finished with white polyester powder by two-stage electrostatic method.
- Heavy duty spring -locked type lamp holder G13
- Cable THW 0.5 sq.mm. 105°C (TIS.11-1988 STANDARD)
- Suitable for general purpose with high efficiency requirement.
- Protection Class : IP20
- Application : Warehouse, Factory, Canteen

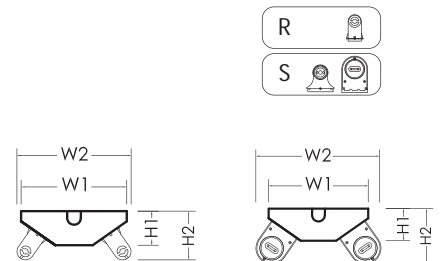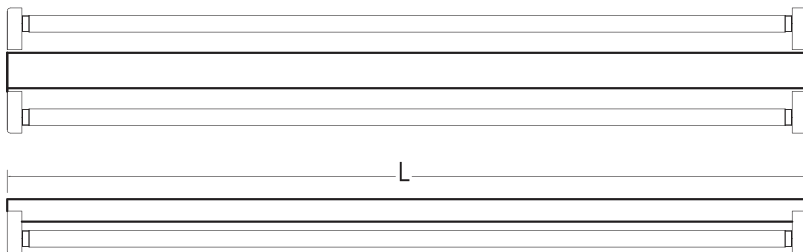

MODEL	Type	Dimension				
		W1	W2(R/S)	L1(R/S)	H1	H2(R/S)
CL-BT-02-118-(R/S)	1 x FL T8 (S)	155	155/155	610/635	50	95/110
CL-BT-02-218-(R/S)	2 x FL T8 (S)	155	170/195	610/635	50	70/85
CL-BT-02-318-(R/S)	3 x FL T8 (S)	155	170/195	610/635	50	95/110
CL-BT-02-136-(R/S)	1 x FL T8 (L)	155	155/155	1220/1245	50	95/110
CL-BT-02-236-(R/S)	2 x FL T8 (L)	155	170/195	1220/1245	50	70/85
CL-BT-02-336-(R/S)	3 x FL T8 (L)	155	170/195	1220/1245	50	95/110

* (S) = Short Lamp (600 mm.) , (L) = Long Lamp (1200 mm.)